





17.65 MAX 11MIN(mm)

SCHEMATIC (NON-SHORTING)

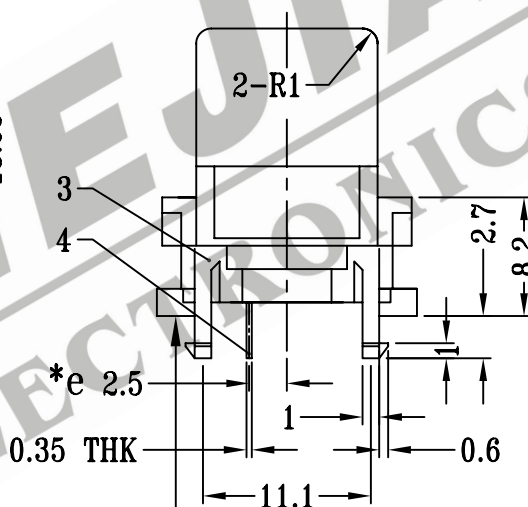

P.C.B MOUNTING FACE

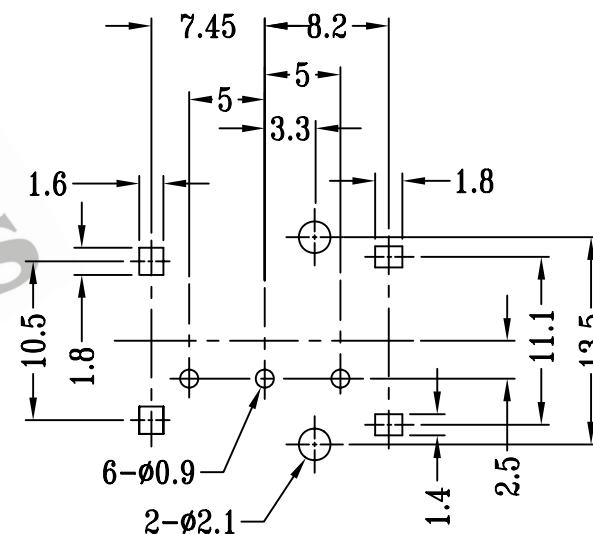

P.C.B LAYOUT

OPERATING FORCE: 50±20gf

注:带“*”表示关键尺寸(5个)

8					TOLERANCE UNLESS SPECIFIED		SHENZHEN XIEJIA ELECTRONICS CO.,LTD.					
7	TERMINAL	NYLON/BRASS STRIP	2	BLACK/Ag PLATED								
6	CASE	NYLON 66 + FIBER 33%	1	BLACK	WITHIN: 1.5±0.1mm OVER : 1.5±0.2mm				DESCRIPTIONS		APPD.	
5	SLIDER	NYLON 66 + FIBER 33%	1	BLACK			ISSUE	DATE				
4	SPRING	SUS	1	TEMPER	TITLE : HOOK SWITCH			UNIT : MM		DRWG NO.: XJ-DR-HS12L02-00		
3	CONTACT CLIP	PBS	2	Ag CLAD								
2	KNOB	POM	1	WHITE	MODEL: HS-12L02			SCALE: 2 : 1		DWN.	ZHOUYU	2005-12-9
1	COVER	POM	1	BLUE						CHK'D	FANGYING	2005-12-9
NO.	PART NAME	MATERIAL	Q'TY	FINISHING	ALL MATERIALS MUST BE COMPLIANT TO ROHS			APPD.	KANGXINAN	2005-12-9		