






6.05 MAX 2.65 (mm) MIN




SCHEMATIC (NON-SHORTING)

TRAVEL POSITION
TOTAL TRAVEL POSITION

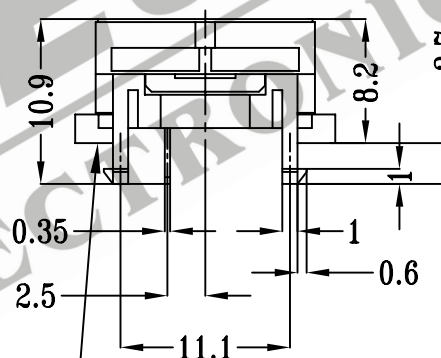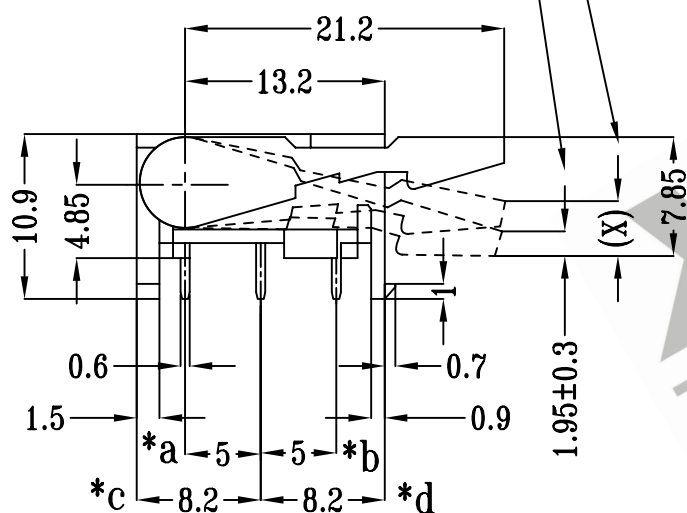

—P.C.B MOUNTING FACE

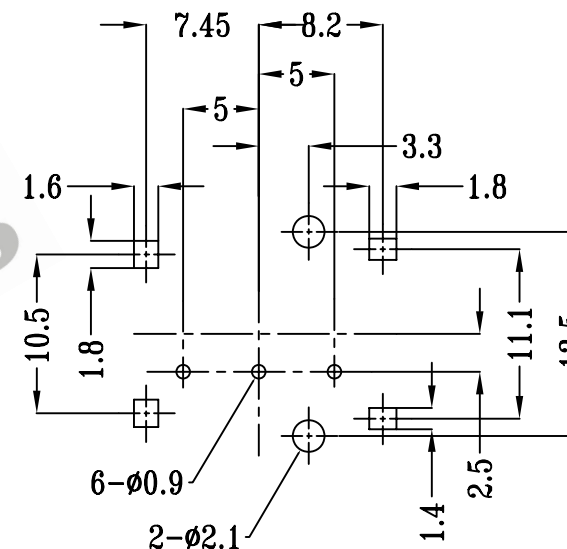

P.C.B LAYOUT

注:带“*”表示关键尺寸(7个)

8					TOLERANCE UNLESS SPECIFIED		SHENZHEN XIEJIA ELECTRONICS CO.,LTD.					
7	HS22L01 TERMINAL	NYLON/0.33mm BRASS STRIP	2	BLACK/Ag PLATED								
6	HS22L01 CASE	NYLON 66 + FIBER 33%	1	BLACK	WITHIN: 1.5±0.1mm OVER : 1.5±0.2mm							
5	HS22L01 SLIDER	NYLON 66 + FIBER 33%	1	BLACK			ISSUE	DATE	DESCRIPTIONS		APPD.	
4	HS22L01 SPRING	Ø0.29mm SUS	1	TEMPER	TITLE : HOOK SWITCH			UNIT : MM		DRWG NO.: XJ-DR-HS12L01-00		
3	HS22L01 CONTACT CLIP	0.11mm PBS	2	Ag CLAD								
2	HS22L01 KNOB	POM	1	WHITE	MODEL: HS-12L01			SCALE: 2 : 1		DWN.	ZHOUYU	2004-6-9
1	HS22L01 COVER	POM	1	BLUE						CHK'D	FANGYING	2004-6-9
NO.	PART NAME	MATERIAL	Q'TY	FINISHING	ALL MATERIALS MUST BE COMPLIANT TO ROHS					APPD.	KANGXINAN	2004-6-9